


## 内螺纹截止阀

### Threaded Globe Valve

- ◇ 材 质: 304, 316
- ◇ Material: 304, 316

#### 主要参数 Parameters(mm)

size	d	D	L	H
1/2"	15	70	66	89.4
3/4"	20	86	68.5	89.2
1"	25	76.5	78.3	92.5
1-1/4"	32	103.5	86	118
1-1/2"	40	103.5	95	117
2"	50	121	110.5	142

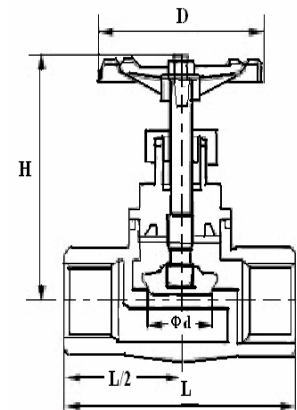

## 波纹管截止阀 Bellow Globe Valve

- ◇ 使用压力 200PSI
- ◇ 材质 304,316
- ◇ 法兰连接标准 ANSI B16.5 PN2.0
- ◇ 结构长度标准 ANSI B16.10 PN2.0
- ◇ Working pressure 200PSI
- ◇ Material 304,316
- ◇ Flange size ANSI B16.5 PN2.0
- ◇ Face to face ANSI B16.10 PN2.0

#### 主要参数 Parameters(mm)

size	L	D	D1	D2	b	Z-d	H	DO
1/2"	130	95	65	45	14	4-14	118	120
3/4"	150	105	75	55	16	4-14	118	120
1"	160	115	85	65	16	4-14	146	140
1-1/4"	180	135	100	78	18	4-18	171	160
1-1/2"	200	145	110	85	18	4-18	187	180
2"	230	160	125	100	20	4-18	200	200
2-1/2"	290	180	145	120	20	4-18	231	250
3"	310	195	160	135	22	8-18	381	280
4"	350	215	180	155	24	8-18	428	300
5"	400	245	210	185	26	8-18	486	320
6"	480	280	240	210	28	8-23	566	400
8"	600	335	295	265	30	12-23	648	400

